


FUNNY BENCH BY BELLITALIA

OE-BI-3167

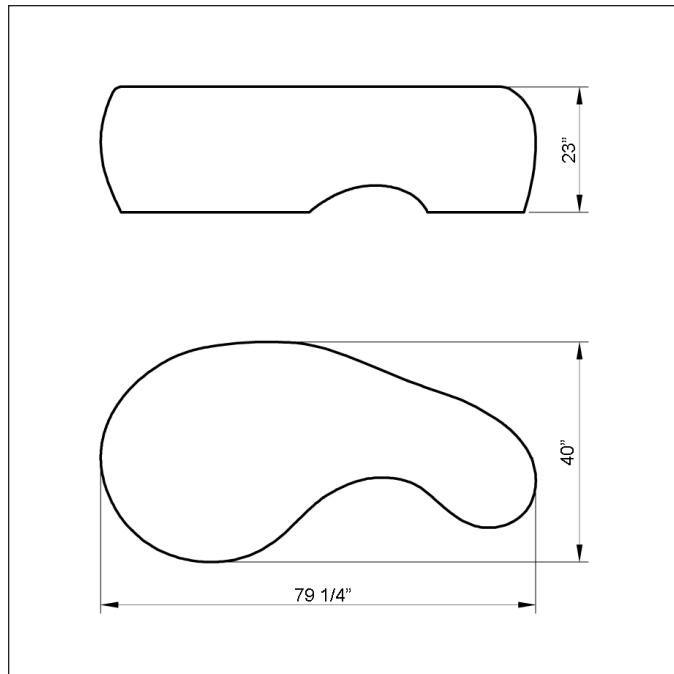

The Funny Bench is from Bellitalia's Organic line. It is composed by a curiously shaped and irregular seat. Its particular curve permits a harmonic crossing between different elements and between different colors combinations.

MATERIALS

The Funny Bench is manufactured using white granite conglomerate. The bench is reinforced and embedded with bushings that permit its lifting, and that are covered with a Bellitalia plate after the placement. The bench's surfaces can undergo a "glossy paint" treatment, based on a covering with a bi-component base and an acrylic polyurethane varnish. This treatment is available in a choice of three colors: Fire Red (RAL3000), Jet Black (RAL9005) or Pure White (RAL9010). Alternatively all surfaces can be finely bush hammered, except for the seat's surface that is left smooth natural and then covered with a transparent anti-decay coating, or an anti-graffiti product. All edges are rounded or made blunt.

INSTALLATION

Simply place on the flooring.

MAINTENANCE

ASSEMBLY: It is important to check fasteners at a minimum once per year. This includes any screws, bolts and nuts.

METAL FINISHES: Outdoor use will require periodic finish inspection and maintenance. Inspect periodically for damage that has removed painted surfaces. Clean metal surfaces with a soft cloth or soft brush with a mild detergent. Do not use high pressure washers, steam cleaning, abrasive cleansers, or steel brushes. Touch up small damaged areas with an appropriate outdoor paint. Painted finished require periodic inspection for scratches or dents that may chip paint away. For repair, remove any loose paint and lightly sand the area. Apply a coat of a rust sealant and reapply a matching paint.

WOOD FINISHES: Exterior woods require no maintenance. To clean the wood, use with a soft cloth or soft brush with a mild detergent. Do not use high pressure washers, steam cleaning, abrasive cleansers, or steel brushes.

Stains in wood may be removed by:

1. Removing dust and cleaning the wood, using a mild detergent.
2. Sand the surface with 180 grit sandpaper
3. Apply a coat of impregnating varnish, intended to preserve the color and enhance the natural beauty of wood. It is possible to apply by spray, roller or brush. A minimum of two coats is recommended (with a gap of at least 8 hours and at a temperature of 60 ° F).
4. Allow to dry.

Reoiling Wood: Outdoor woods may be reoiled or impregnated to preserve or enhance the color of the wood. To do so:

1. Remove dust and clean the slats.
2. Apply a single coat of impregnating varnish or oil, intended to preserve the color and enhance the natural beauty of wood.
3. Allow to dry.